COMPACT PALLETIZER

An affordable end of line palletizing solution!





Patent # 9,511,957

- → Palletize Boxes, Bags or Pails by placing this equipment at the end of your line.
- → Reduce or eliminate costly repetitive injuries associated with palletizing.
- → Affordable lease options available. Be cash flow positive right away.
- → Return On your Investment in less than two years.





ROI Machinery & Automation Inc 1534 Cher Dr. Bldg. 2 Durham, NC 27713 PH: 919-788-7728 www.ROIMachinery.com



Compact Palletizer


The Compact Solution for End of Line Palletizing!


The ROI Compact Palletizer is the answer for many end of line palletizing operations. With a small footprint in a pre-assembled package, the ROI Compact Palletizer is easy to set up, and quickly provides a return on your investment.

Palletizing operations for slow to moderate rate packaging lines are a problem for most companies. Repetitive motion injuries and training / re-training costs can eat away at productivity and profits.

Space constraints in existing facilities are also a challenge. Reconfiguring production lines for end of line automation is typically prohibitive or nearly impossible without major and costly changes.


The ROI Compact Palletizer may be the solution you have been looking for. The small size easily fits into existing tight spaces, typically not taking more space than what is currently being used for manual palletizing. The system also eliminates the ergonomic and repetitive motion issues of manual palletizing operations

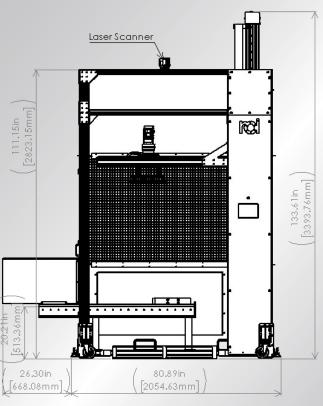

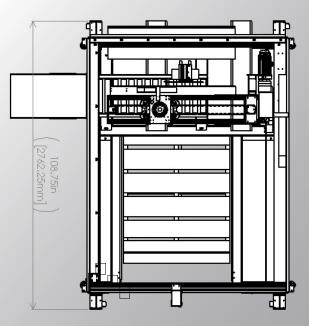

Patent # 9,511,957

The base model allows for pallet jack loading and removal of pallets from the palletizer. A hinged door provides access to the side and a laser scanner is used to guard the pallet entrance / exit.





Compact Palletizer

Features / Specifications:

Maximum capacity: 100 kg (220 lbs)

Product type: Cartons, Bags, Pails, etc.

Palletizing Rate: 8 - 10 cycles per minute.

NOTE: can handle multiple boxes or pails in one pick to increase the palletizing rates.

Palletizing Height:

Model CP100-8 - up to 8' high (96") Model CP100-5 - up to 5' high (60")

Structure: Heavy duty welded tubular steel base and aluminum profile or steel frame. Preassembled on casters for transport and easy positioning.

Enclosure: Aluminum diamond plate panels and 1" Wire mesh panels or polycarbonate panels on 3 sides.

Overall Height: CP100-8 - 11'3" CP100-5 - 8'6"

Tooling: Single zone vacuum tool for cartons.

More end of arm tools are available.

Conveyor: Powered conveyor, 72" long, conveys product into the palletizer.

Safety: Integrated safety controls and access

Interlock / safety scanner.

Controls: Integrated control system with HMI interface to select pallet programs.

Power: 230 VAC – 3p 26 amps or 460 VAC – 3p 14 amps

Compressed Air: 13-20 scfm @ 80 psi Warranty: 1 year Parts and Service

Optional 3 year - extended warranty


Add pre-engineered and integrated equipment for even more productivity.



Pallet Dispenser




Tier Sheet Dispenser

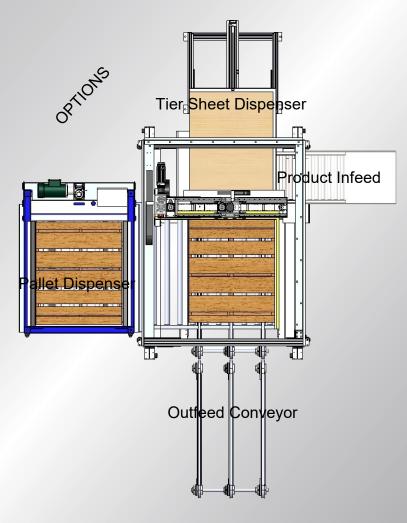




Pail Gripper



Bag Gripper



Box Buffering



Questionnaire

Compact Palletizer

Company Name:			
Contact:			
Address:			Rear
City, State, Zip:			
Phone:			
Email:		Left	Infeed Direction Right
Project Name:			
Bas	sic Configura	ation Details	
Stack Height: □ Up to 8 ft.			Service Services of the
☐ Up to 5 ft.			
Infeed position:			ъ ч ш
Infeed (line) Height:			
Rates: Parts / Min			
Number of Pallet Patterns:		Patterns Submitted wi	th Quote: □Yes □No
Voltage Requirement: □2	08 - 3phase 60l	Hz 26a □ 460V - 3	phase 60Hz 14a
What are you palletizing:	□Boxes □B	ags □Pails □Othe	r:
Dims: Box 1:	weight:	Box 4:	weight:
Box 2:	_ weight:	Box 5:	weight:
Box 3:	_ weight:	Box 6:	weight:
Dims: Bag 1:	weight:	Box 2:	weight:
Pail Info:	_ weight	(For more produ	cts, attach another sheet)
OPTIONS: □ Automated Pa	allet Feed 🔲	Product Infeed convey	or(s) □ Tool Changer
□ Extra Box Gri	pper □Bag G	ripper 🗆 Pail Gripper	☐ Box Buffering System
☐ Installation ☐	Service Agreer	ment □ Other:	<u> </u>
ls label orientation importan	t: □Yes □No	Specify location of	label:
What is your package mate	rial(s):	Open to	pp: ☐Yes ☐No
What is the maximum stack	height:	Overhead clea	arance:
Other Information:			

machinery & automation

Email: Customerservice@roimachinery.com / Fax: 919-788-7729